B&W Digital Production Printers



Ricoh Pro™ 8320s/8310s series



Build your business with stability, quality, reliability and versatile printing

What does it take to expand your in-house print production? How can you get the stable performance you need?

The new Ricoh Pro 8320/8310 delivers exactly what your competitive environment demands. And more besides. Our printers offer impressive black and white speeds for high document volume at up to 136ppm. Robust design that stands the test of time with auto recovery to minimise downtime and maximise your turnaround time and large operation panel for simple usability.

The brand new range of automated high-end finishing options gives you even greater versatility to capture more business from speciality books to professional bids and manuals.

The new Ricoh Pro 8320/8310 offers the new options you need to grow and enhance your business.



Better technology and value

The latest laser technology

Our innovative VCSEL* technology gives best in class resolution of 2400 x 4800dpi creating outstanding image quality. VCSEL has as many as 40 laser beams emitting simultaneously to give exceptionally accurate and smooth, professional quality. Indirect transfer belt technology also contributes to higher image quality, plus new process control maintains higher image consistency over long runs.

*Vertical Cavity Surface Emitting Laser

Uptime maximised

- Operators can replace Operator Replaceable Units (ORU) to maximise uptime
- Remote assist by Ricoh operator minimises downtime
- Simplified fuser section for faster and easier maintenance
- Faster warm up times and recovery from energy saver mode helps improve output and increase efficiency

Increased reliability

- Fewer paper jams to improve productivity
- Higher duty cycle
- Enhanced purge function for auto recovery

Brand new options and opportunities



New High-end Finisher

- More robust finisher with non-stop delivery
- Increased stack capacity with dual shift trays (1000 sheets, 3500 sheets)
- Enhanced saddle-stitching capabilities with max 30 sheets (80gsm)
- Better folding for thinner booklets to enhance production
- Support up to 350gsm
- Higher productivity



New Interposer

- Coated paper can be fed continuously by air-assisted feeding from the leading edge
- Support up to 350gsm
- 2-tray per >200 sheets
- Stands on its own for stability



New Trimmer

- Trims 30-sheet booklets to enhance productivity
- Fore edge trimmer



 Connect Plockmatic Booklet Maker to the mainframe without a finisher

High-end advantages to keep you ahead

New Ring binder

- Fully automates binding workflow, saving time and labour costs
- Ease of operation as the system process from printing to closing rings without manual intervention
- Two sizes of consumable rings are available for 50 or 100 A4 sheets
- Black/white coloured rings available
- Smaller footprint saves installation space

GBC eWire Binder

- New fully automated inline binding system using traditional twin-loop wire binding eliminates manual processes for increased productivity
- Binds plain, coated and tabbed stock and paper weights from 63gsm up to 350gsm (16lb bond – 130lb cover)
- Produces high-end proposals, booklets, reports, directories, calendars, educational books and manuals and speciality books to expand your client base

More benefits for higher volumes



High Capacity Stacker

- Stacks up to 5000 sheets (SRA3, A4, LT size) on shift tray and 250 sheets on one proof tray
- Air-assist function for enhanced stack performance



Vacuum Feed LCIT

- Improved pick-up/feeding increases productivity and reduces downtime
- Two trays can be connected



Higher-output Capacity Finisher

New Finisher is capable to output 3500 sheets in shift tray and 1000 sheets to proof tray. It allows continuous printing in long runs.

High-value opportunities

Transactional printing

Ricoh's genuine IPDS print option opens the way for you to take advantage of high value transactional documents.

- Barcodes can be printed onto address labels, direct mail pieces and envelopes
- To maintain productivity, invoices and statements can be scheduled to print overnight
- Also supports Magnetic Ink Character Recognition (MICR) printing of cheques

Accurate, full speed production

Print streams are managed at page level for error-free production at full speed

Ricoh workflow solution

TotalFlow Production Manager offers a single solution to manage jobs across multiple output devices whilst enabling automated workflow functionality including integrated imposition* and pre-flight** to streamline production and reduce errors associated with problem files.

Both solutions offer open connectivity with Ricoh, EFI Fiery™ and third party *** Digital Front End.

(Powered by * Ultimate and **Enfocus)

*** Professional Services may be required.

Versatile media support




Expand in-house production

- Superb printing performance on everything from carbonless paper, textured and coated media to envelopes and pre-printed forms
- Supports paper weights from 40gsm to 350gsm, option dependent
- Also supports larger sheet size up to 700mm



More options to succeed

- Lets you offer clients everything from text books and luxury books to office documents, manuals and poster printing
- Enables the same media to be used for offset and digital production
- Optional decurl unit eliminates paper curl which can be a problem with the use of long grain and lightweight media

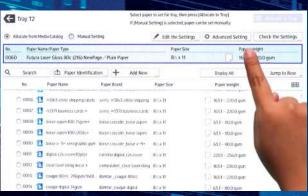

Extensive media library

- Ricoh's extensive onboard media library provides automated settings for a variety of branded media and media types
- Simplifies set up and ensures reliable performance

The power for performance

Enhanced processing performance

Benefit from a high performance 1.91GHz Atom Processor, 2GB memory and 320GB x 2 SATA. It delivers faster processing of complex print jobs and supports finishing options to suit your needs and broaden your client offering.

Robust functionality for maximum productivity

The new EFI controller EB-35 helps simplify file management and job workflow for greater efficiency.



All the options you need to succeed



- **1** Pro[™] 8320/8310s Series
- 2 New large 17 inch Operation Panel
- 3 4,400 sheet vacuum feed large Capacity Tray
- 4 Standard Paper Trays
- 5 New Cover Interposer
- 6 5,000 sheet High Capacity Stacker
- 7 New Booklet Finisher
- **8** Optional Bypass

Ricoh Pro[™] 8320s/8310s series

MAIN SPECIFICATIONS

GENERAL

Print/Copy Process: 1-drum dry electrostatic transfer system with

internal transfer belt Oil-less belt-fusing method

Fusing: Toner Type: Newly formulated pulverized toner Print Speed: 8310s and 8310: 111ppm 8320s and 8320: 136ppm

Resolution: VCSEL: 2400 x 4800dpi Print: 1200 x 1200dpi

Warm-up time: >300 seconds

Dimensions (W \times D \times H): 8300s: 1141mm x 900mm x 1558mm

8320s:1141mm x 900mm x 1735mm 8310s: 1141mm x 900mm x 1735mm

Weight: MFP model: 428kg

Power Source: EU: 220-240V,16A, 50/60Hz Life: 60,000,000 A4 pages or 5 years Life:

Duty cycle: 8320s/8320: 4million 8310s/8320: 3.3million

Printer model: 413kg

SCANNER FEATURE

100/150/200/300/400/600dpi Resolution:

200dpi as a default B&W 120 simplex/220 duplex Scan speed:

(A4 LEF/200dpi)

Colour 120 simplex/220 duplex

(A4 LEF/200dpi)

297 x 432mm Max Scan Area:

MEDIA HANDLING

Paper Input Capacity: 1st tray (std) 1,100 sheets x 2 (Tandem Tray)

> 2nd trav (std) 550 sheets 3rd tray (std) 550 sheets

A4/LT LCT (op) 4th tray 1,100 sheets 5th tray 1,100 sheets 6th tray 2,800 sheets A3/DLT LCT (op) 4th tray 1,100 sheets 5th tray 2,200 sheets 6th tray 1,100 sheets Bypass tray: 500 sheets Vacuum Feed LCT (op) T1 tray 2,200 sheets T2 tray 2,200 sheets 12,600 sheets

Max. Input Capacity: Max. Output Capacity: Paper size:

Width: 100 x 330.2mm Length: 139.7 x 700mm Paper Weight:

1st tray (std) 52.3 - 256gsm 2nd tray (std) 52.3 - 256gsm 3rd tray (std) 52.3 - 256gsm

A4/ITICT

14,500 sheets

4th tray 52.3 - 216gsm 5th tray 52.3 - 216gsm 6th tray 52.3 - 163gsm A3/DLT LCT 4th tray 52.3 - 256gsm

5th tray 40.0 - 300gsm 6th tray 52.3 - 256gsm Tray A 52.3 - 216gsm

Multi Bypass Tray: 52.3 - 216gsm

Vacuum Feed LCT T1-T4 tray 40 - 350gsm

CONTROLLER

Embedded Configuration:

Intel® Atom® Processor Bay Trail - 1 (1.91GHz) CPU:

Memory: 2GB HDD: 640GB DVD-ROM Drive: N/A Operating System: Linux

Network Protocol: TCP/IP (IP v4, IP v6)

PCL5e, PCL6, PDF, JPEG, TIFF, XPS, RP/GL2 Optional: Adobe PostScript 3, IPDS

PCL: 45 fonts. 13 International fonts Font: Network Interface: Ethernet 1000Base-T/100Base-TX/10Base-T

USB2.0 TypeA (2 port on controller board, 4 ports on operational panel), USB2.0 TypeB (2 ports on controller panel), SD Slot on

operational panel

EFI CONTROLLER

Configuration: Optional: External

CPU: Intel® Pentium® processor G4400 (3.3 GHz)

Memory: 8GB HDD. 500 GB DVD-RW Drive: N/A

Operating System: Windows® 10 IoT Enterprise 2016 LTSB

TCP/IP (IP v4, IP v6), SMB Network Protocol:

PostScript 3 (CPSI ver.3020 & APPE ver.4.4), PCL6 PDL:

PS3 136 + 2mm, PCL80

Supported Data Format: PS, PDF, PDF/X, EPS, TIFF, PCL, PDF/VT, PPML, VPS Print Resolution: 1200dpi/2bit

Network Interface: Ethernet 1000 - T/100 - TX/10 base - T

OTHER OPTIONS

Font:

Input: Vacuum Feed Large Capacity Tray (Vacuum Feed

LCIT RT5120), A4/LT Large Capacity Tray (RT5130), 13" x 19.2" Large Capacity Tray (RT5110), A3/DLT Tray Kit (TK5020), Multi Bypass Tray (BY5020), Multi Bypass Banner Sheet Tray Type S9, Cover Interposer Tray (CI5040), Plokmatic High Capacity Interposer (HCI3500), Vacuum Feed banner Sheet Tray Type S9

Output:

Finisher (SR5110), Booklet Finisher (SR5120), Punch Unit(PU5030), Booklet Trimmer (TR5050), Ring Binder (RB5030), Perfect Binder (GB5010), Multi-Folding Unit (FD5020), High Capacity Stacker (SK5040), Plockmatic PBMe, Plockmatic

MPS stacker, GBC Stream Punch Ultra, GBC E-wire Binder

Others

Bridge Unit(BU5020), Buffer Pass Unit Type S11, Decurl Unit (DU5070), ORU Type S11, PostScript3 Unit Type S11, IPDS Unit Type S11/S12, RPIP Interface Box Type S3, Media Identification Unit Type S3 EFITM Fiery Controller EB-35

WORKFLOW SOLUTIONS

Ricoh TotalFlow Prep & Production Manager, TotalFlow BatchBuilder, Ricoh ProcessDirector, InfoPrint Manager, MarcomCentral, FusionPro VDP Suite, EFI Digital StoreFront, EFI Graphic Arts Premium Package, EFI Impose & Compose, OL Connect Suite

















RICOH @Remote





The facts and figures shown in this brochure relate to specific business cases. Individual circumstances may produce different results. All company, brand, product and service names are the property of and are registered trademarks of their respective owners. Copyright © 2019 Ricoh Europe PLC. All rights reserved. This brochure, its contents and/or layout may not be modified and/or adapted, copied in part or in whole and/ or incorporated into other works without the prior written permission of Ricoh Europe PLC.

Compact B&W Digital Office Production Printers

RICOH imagine. change.

Ricoh Pro™ 8300s




Small in size. Big in flexibility

Limited on space? Need a simpler printing solution that's both easy to use and reliable? The Ricoh Pro 8300s brings you market-leading innovation wrapped up in a small footprint, which makes it the ideal fit for office and school environments.

Along with enhanced image quality delivered at 96 pages per minute, the compact Pro 8300s comes with a brand new smaller finisher and simple output tray to reduce the system size.

With improved user-friendliness and higher productivity it offers the reliability you need each and every day.



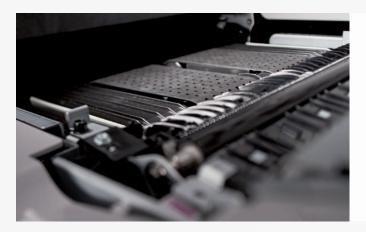

Designed to be productive and reliable

Delivers high volume, black and white output at speeds up to 96ppm providing the quality and reliability you need.



The perfect fit

With floor space at a premium, the small footprint and new downsized finisher of the Ricoh Pro 8300s accommodates all your needs, including restricted budgets.



Enhanced copy function

New technology allows you to minimize darker area around a spine, which is generated when copying books, for clearer, easier to read results.



High image quality

The Pro 8300s uses VCSEL* technology to provide clean, smooth high definition image quality with 2400 x 4800 dots per inch resolution and higher consistent image quality over long runs.

*Vertical Cavity Surface Emitting Laser

Increase your output with ease

Easier for everyone to use

- New large 17 inch operation panel for simpler usage
- Machine configuration can be shown
- For remote operation the panel screen can be used on a tablet



Simple output tray

The brand new simplified output tray with slide and shift for each set, has a 1250 sheet capacity of 52-216gsm, making light work of collecting everything you print.



Improved reliability

- Improved purge function for better productivity
- New LED guidance for ease of operation



Better productivity and value



Media capability

- Enhances your output versatility
- Handles a wide range of paper including carbonless paper, textured and coated paper plus weights up to 300gsm



Uptime maximised

- Operators can replace Operator Replaceable Unit (ORU) to maximise uptime
- Remote assist capability to maximise uptime



Shorter waiting times

Faster warm-up time helps increase efficiency to give you the outstanding results you need.

New finisher for small spaces

- The low cost and space-saving finisher has a small footprint of 657mm length, total 1798mm including mainframe
- Output paper weight from 52 300gsm, saddle stitched up to 20 sheets, side stitched up to 65 sheets
- The shift tray can stack 3000 A4 sheets and 1500 A3 sheets to increase productivity



Pro 8300s



- 1 Pro 8300s series
- 2 Colour LCD Panel
- 3 5000 sheet A4 LCT
- 4 Standard paper trays
- 5 Booklet Finisher
- 6 ARDF Document Feeder

7

Ricoh Pro 8300s

MAIN SPECIFICATIONS

GENERAL

Print/Copy Process: 1-drum dry electrostatic transfer system with

internal transfer belt Fusing: Oil-less belt-fusing method Toner Type: Newly formulated pulverised toner

Print Speed: 96ppm

VCSEL: 2400 x 4800dpi Resolution: Print: 1200x1200dpi Warm-up time: 300 seconds or less

Dimensions (W \times D \times H): 8300s: 1141 x 900 x 1558mm

(including status light)

Weight: 413kg

Power Source: EU: 220-240V,16A, 50/60Hz Max Monthly Volume: > Life: 60,000,000 A4 pages or 5 years Duty cycle: 8300s - 2.9 million

SCANNER FEATURE

Resolution: 100/150/200/300/400/600dpi

200dpi as a default

Scan speed: B&W 120 simplex/220 duplex

(A4 LEF/200dpi)

Colour 120 simplex/220 duplex

(A4 LEF/200dpi)

297 x 432mm Max Scan Area:

MEDIA HANDLING

Paper Input Capacity: 1st tray (std) 1,100 sheets x 2 (Tandem Tray)

2nd tray (std) 550 sheets 3rd tray (std) 550 sheets A4/LT LCT (op) 4th tray 1,100 sheets 5th tray 1,100 sheets 6th tray 2,800 sheets A3/DLT LCT (op) 4th tray 1,100 sheets 5th tray 2,200 sheets 6th tray 1,100 sheets

Max. Input Capacity: Max. Output Capacity:

Paper size:

Width: 100 x 330.2mm Length: 139.7 x 487.7mm Paper Weight: 1st tray (std) 52.3 - 256gsm 2nd tray (std) 52.3 - 256gsm

3rd tray (std) 52.3 - 256gsm

A4/LT LCT

8,500 sheets 3.000 sheets

4th tray 52.3 - 216gsm 5th tray 52.3 - 216gsm 6th tray 52.3 - 163gsm

Bypass tray: 500 sheets

A3/DLT LCT

4th tray 52.3 - 256gsm 5th tray 40.0 - 300gsm 6th tray 52.3 - 256gsm Tray A 52.3 - 216gsm

CONTROLLER

Configuration: Embedded

CPU: Intel® Atom® Processor Bay Trail - 1 (1.91GHz)

Memory: 2GB HDD: 640GB DVD-ROM Drive: N/A Operating System: Linux

Network Protocol: TCP/IP (IP v4, IP v6)

PCL5e, PCL6, PDF, JPEG, TIFF, XPS, RP/GL2 PDL:

Optional: Adobe PostScript 3, IPDS PCL: 45 fonts. 13 International fonts Font:

Network Interface: Ethernet 1000Base-T/100Base-TX/10Base-T USB2.0 TypeA (2 port on controller board, 4 ports on operational panel), USB2.0 TypeB

(2 ports on controller panel), SD Slot on operational panel

OTHER OPTIONS

A4/LT Large Capacity Tray (RT5130), A3/DLT LCT Input:

(RT5110), A3/DLT Tray Kit (TK5020),

Multi Bypass Tray (BY5020)

Finisher (SR5090), Booklet Finisher Output:

(SR5100), Punch Unit (PU3090), Shift Sort Tray SH5000

Others: Decurl Unit (DU5070), ORU Type S11,

PostScript3 Unit Type S11, IPDS Unit Type S11,

Attention Light AL3000

WORKFLOW SOLUTIONS

Ricoh TotalFlow Prep & Production Manager, FusionPro VDP Suite

















RICOH @Remote



